



PRIMARY BELT CLEANER – PRUS

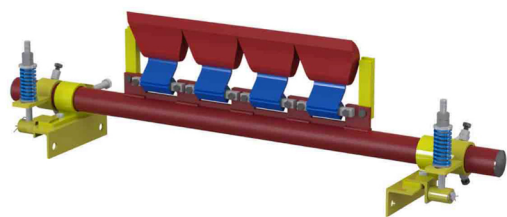

Blade Type
PRUS

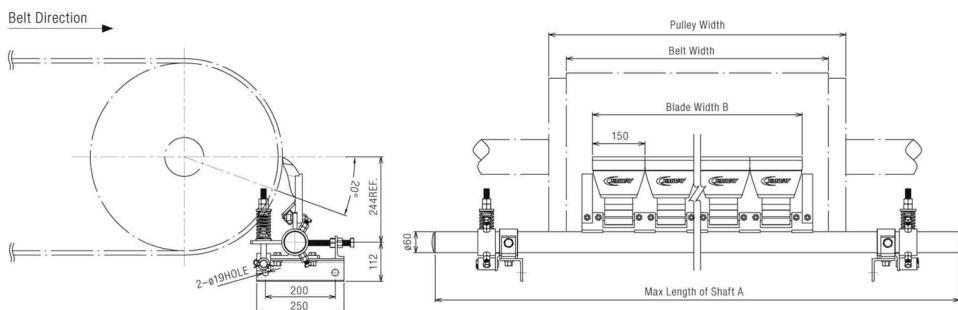

FEATURES

SPECIAL-DESIGN BLADE

The blade is lighter, cost-saving and easy to maintain.

EACH BLADE WITH RTAM

Each blade with their own RTAM constantly contacts with belt under suitable pressure, and fits with belt surface to achieve better scraping performance.

RTAM

RTAM can avoid belt from damage of blade by absorbing external force.

SAVE COST

Simple spring tensioners are cost-saving and suitable for general speed belt conveyor.

APPLICATION

Suitable for conveying material, such as coal, coke, salt, fertilizer, limestone, sandstone, sulfur, etc.

Unit: mm [in]

Model	Belt Width	Max Length of Shaft A	Blade Width B	TIP Q'TY [N]
-060	600 [24]	1650 [65]	450 [17]	3
-065	650 [26]	1750 [69]	450 [17]	3
-075	750 [30]	1800 [71]	600 [23]	4
-080	800 [31]	1900 [75]	600 [23]	4
-090	900 [35]	1950 [77]	750 [29]	5
PRUS -100	1000 [40]	2100 [83]	900 [35]	6
-105	1050 [42]	2150 [85]	900 [35]	6
-120	1200 [48]	2250 [89]	1050 [41]	7
-140	1400 [54]	2450 [96]	1200 [47]	8
-160	1600 [63]	2750 [108]	1350 [53]	9
-180	1800 [72]	2950 [116]	1500 [59]	10
-200	2000 [78]	3150 [124]	1650 [64]	11