
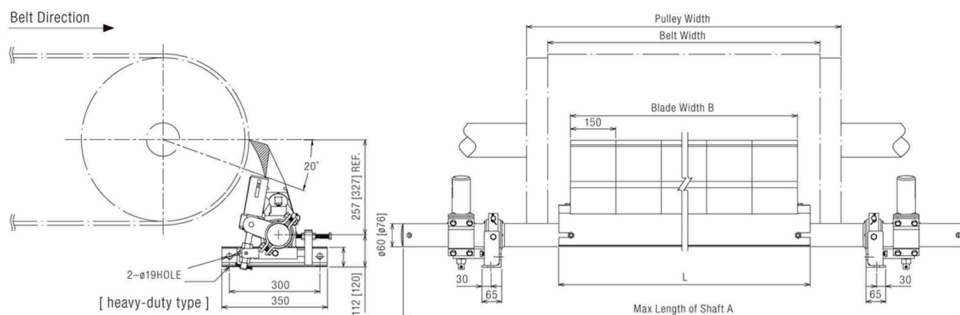


PRIMARY BELT CLEANER – CRT1

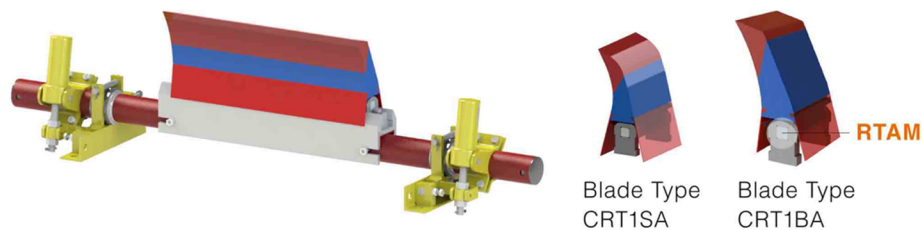

FEATURES

EACH BLADE WITH RTAM

Each blade with their own RTAM constantly contacts with belt under suitable pressure, and fits with belt surface to achieve better scraping performance.

RTAM

RTAM can avoid belt from damage of blade by absorbing external force.

SPECIAL FOR HIGH LOADING AND HIGH SPEED BELT CONVEYOR

Combined with RTAM, the low friction coefficient, low wear and high strength blade is priority option.

EASY

By modular design, it is easy to install and maintain.

APPLICATION

Suitable for conveying material, such as coal, coke, sinter, salt, iron ore, fertilizer, limestone, sandstone, sulfur, etc.

Unit: mm [in]

Model	Belt Width	Max Lengh of Shaft A	Blade Width B	L	TIP Q'TY [N]
-060	600 [24]	1650 [65]	450 [17]	530 [20]	3
-065	650 [26]	1750 [69]	450 [17]	530 [20]	3
-075	750 [30]	1800 [71]	600 [23]	680 [26]	4
-080	800 [31]	1900 [75]	600 [23]	680 [26]	4
CRT1SA -090	900 [35]	1950 [77]	750 [29]	830 [28]	5
-100	1000 [40]	2100 [83]	900 [35]	980 [38]	6
-105	1050 [42]	2150 [85]	900 [35]	980 [38]	6
-120	1200 [48]	2250 [89]	1050 [41]	1130 [44]	7
-140	1400 [54]	2450 [96]	1200 [47]	1280 [50]	8
▲ -160	1600 [63]	2750 [108]	1350 [53]	1430 [56]	9
CRT1BA ▲ -180	1800 [72]	2950 [116]	1500 [59]	1580 [62]	10
▲ -200	2000 [78]	3150 [124]	1650 [64]	1730 [68]	11

▲ heavy-duty type