



Springavin



Steel Wire Reinforced

Applications:

Transportation of solids and liquids in the general industries, agriculture and the food industry.

Properties:

Reinforced with galvanized wire
Manufactured from material
that is approved for contact with
food according to European
Standard Excellent crush and
erosion resistance over a broad
temperature range.
Excellent durability to weather
conditions and most chemicals.
Bore smooth to minimize friction
loss

Standard Colors:

Transparent – enable visual
control of the process.

Materials:

DOP Free
RoHS, Reach Standard
UV- protections added


Temperatures Range:

-15°C < Temp < 65°C

Standard:

Tolerance: ISO 1307
EC food contact (EU)
10/2011 / 174/2015

Code	Internal Diameter		Weight gr / m ± 10%	Work Pressure Bar / 20°C	Vacuum MH ₂ O	Bending Radius mm	Roll Length m
	mm	Inch					
ARI-012	13	1/2"	220	7	8.5	25	50
ARI-058	16	5/8"	260	7	8.5	32	50
ARI-034	19	3/4"	310	5	8.5	38	50
ARI-078	22	7/8"	410	5	8.5	44	50
ARI-100	25	1"	500	5	8.5	51	50
ARI-130	30		600	4.5	8.5	60	50
ARI-125	32	1 1/4"	600	4.5	8.5	80	50
ARI-150	38	1 1/2"	800	4	8.5	95	50
ARI-140	40		820	3	8.5	100	50
ARI-145	45		1000	3	8.5	112	50
ARI-148	48		1050	3	8	120	50
ARI-200	50	2"	1150	3	8	127	50
ARI-260	60		1500	2.5	7	150	30
ARI-250	63	2 1/2"	1575	2.5	7	158	30
ARI-300	76	3"	2100	2	7	190	30

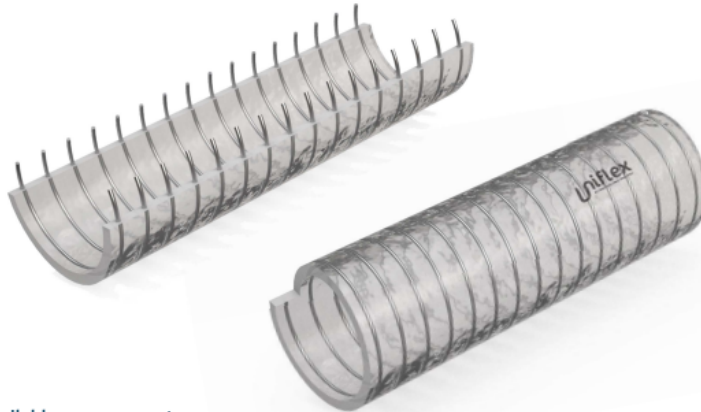

sizes are available upon request.

