


PVC HIGH PRESSURE LAYFLAT HOSE

Heavy Duty(8/10Bar)

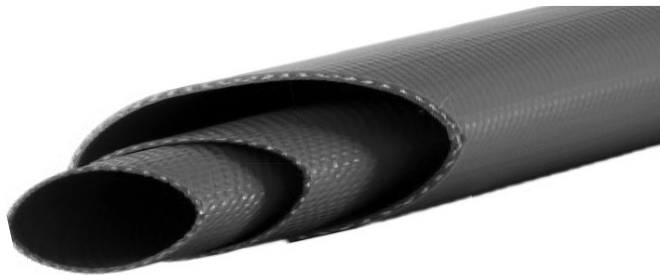

Temperature Range: **F** **C**
 -5°C -65°C
 23 °F -150 °F

CONSTRUCTION:

The tube/cover are flexible and durable PVC, reinforced with 3-ply high tensile polyester yarns, one longitudinal ply and two spiral plies spiral weaved together into knots. Both tube and cover are extruded simultaneously (the reinforced braided jacket is infused after weaving instantly) to obtain excellent bonding

Material:

100% Pure PVC and High Strength Polyester Yarn.

Application:

Mainly used for high pressure sprinkling & dewatering, underground mining, light chemicals delivery, light gavel or mud discharge, construction dewatering, mining delivery, marine industries and so on.

Characteristic:

- High pressure resistant, working pressure is 6-8bar, lays straight without kinking, abrasion resistant with smooth inner layers which make it a super star in mining and quarry area where friction is happened continuously, resistant to light chemicals, excellent performance on sloped ground, UV resistant,
- Assembled with different types fittings and short length available.

CODE	ID.		WALL THICKNESS	W.P.	B.P.	LENGTH	WEIGHT
	inch	mm	mm	bar	bar	m/roll	g/m
400200	3/4	20	1.55	10	30	50	140
400201	1	25	1.8	10	30	50	200
400202	1-1/4	32	1.5	10	30	50	210
400203	1-1/2	38	1.7	10	30	50	290
400204	1-1/2	40	1.9	10	30	50	300
400205	1-3/4	45	2	10	30	50	350
400206	2	51	1.55	8	24	50	350
400207	2	51	1.8	10	30	50	420
400208	2.5	64	1.9	10	30	50	700
400209	3	76	2	8	24	50	660
400210	3	76	2.55	10	30	50	850
400211	4	103	2.25	8	24	50	1000
400212	4	103	2.7	10	30	50	1200
400213	6	153	3	8	24	50	2000
400214	8	203	3.2	6	18	50	2800

