

FLEX-LOK™ Skirting System

Quickly and Easily Eliminate Load Point Spillage


The Flex-Lok™ Skirt Clamp is designed with versatility to meet the needs of any conveyor loading site—even severe, heavy loading applications. The exclusive design features a unique clamp pin with a captive wedge that can be locked in any position 360° around the pin. When properly installed, Flex-Lok ensures the skirt rubber will not rub on the belt and cause premature wear or gouging marks.



Optional limited space Mini Flex-Lok clamps available



Anti-vibration pin ensures pin remains locked

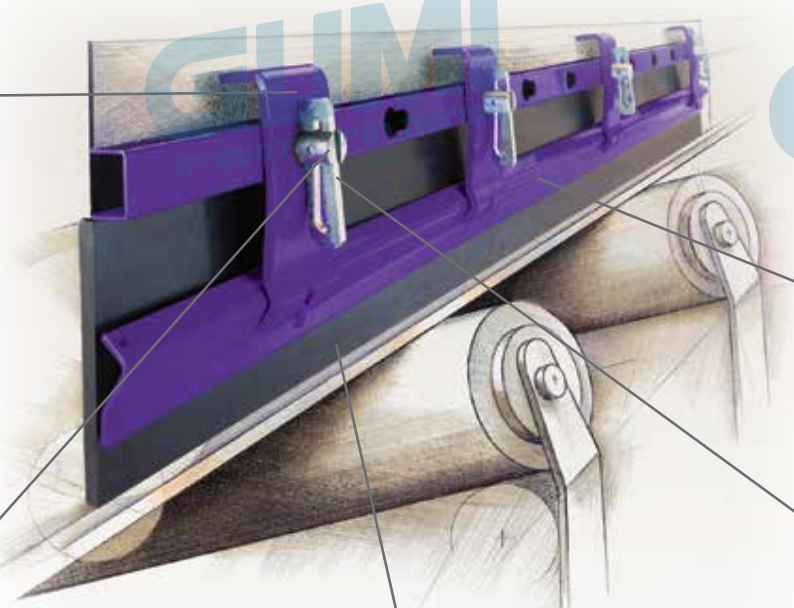

No hassle installation because skirt rubber restraining bar is held in place by clamp plates

Quick adjustment using the locking wedges on the clamp pins

Rubber thickness can vary from 8 to 25mm (5/16" - 1") on Standard and 8 to 16mm (5/16" - 5/8") on Mini

Features and Benefits:


- **No belt damage.** With correct installation, the skirt rubber will not drag on the belt, causing premature wear or gouge marks in the belt cover. Such damage reduces belt cleaning efficiency and the life of the belt.
- **Safe surface access.** All installation and maintenance work can be done safely from the sides of the conveyor. Climbing into the chute to work on nuts and bolts is not required.
- **Long service life.** Flex-Lok Skirt Clamps are made of corrosion-protected components for tough duty. Replacement parts are available.

Ordering Information


| Flex-Lok Skirt Clamp* | | |
|---------------------------------|-----------------|-----------|
| Description | Ordering Number | Item Code |
| Skirt Clamp | FLSC-I | 71052 |
| Replacement Parts | | |
| Clamp Runner - 1.8 M (6 ft.) | FL-RPI | 71058 |
| Clamp Pin | FL-CP-I | 71141 |
| Restraining Bar - 1.8 M (6 ft.) | FL-RBI | 71060 |

*Skirt Rubber Thickness Range: 8 to 25mm (5/16" - 1")

Shaded items are made to order.
Lead time: 5 working days

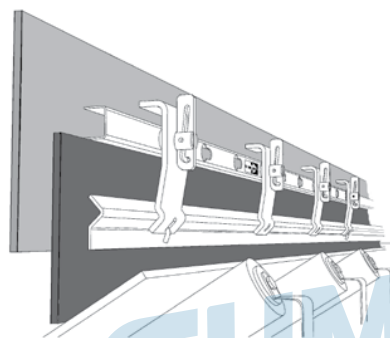

Standard



Standard

240 Macpherson Road • #02-01 • Singapore 348574
Tel: +65-6484-1533 • Fax: +65-6484-1531 • E-mail: asiasales@flexco.com

Visit www.flexco.com for other Flexco locations and products.

©2019 Flexible Steel Lacing Company. 07/02/19. For reorder: X5724



FLEXCO Enclosed Skirt System


Simple and Effective

Not all containment solutions should require complicated measuring and engineering. Standard skirting assemblies with adjustable mounting arrangements provide universal mounting and easy installation.

Ordering Information

| |
|---|
| Skirt Box - 4 Ft with RMC clamps and Skirt Rubber 600 mm |
| Skirt Box - 4 Ft with RMC clamps and Skirt Rubber 750 mm |
| Skirt Box - 4 Ft with RMC clamps and Skirt Rubber 900 mm |
| Skirt Box - 4 Ft with RMC clamps and Skirt Rubber 1050 mm |
| Skirt Box - 4 Ft with RMC clamps and Skirt Rubber 1200 mm |
| Skirt Box - 4 Ft with RMC clamps and Skirt Rubber 1350 mm |
| Skirt Box - 4 Ft with RMC clamps and Skirt Rubber 1500 mm |
| Skirt Box - 4 Ft with RMC clamps and Skirt Rubber 1650 mm |
| Skirt Box - 4 Ft with RMC clamps and Skirt Rubber 1800 mm |
| Skirt Box - 4 Ft with RMC clamps and Skirt Rubber 2100 mm |
| Skirt Box - 4 Ft with RMC clamps and Skirt Rubber 2400 mm |

Sealed rear panel with lift access for easy washout

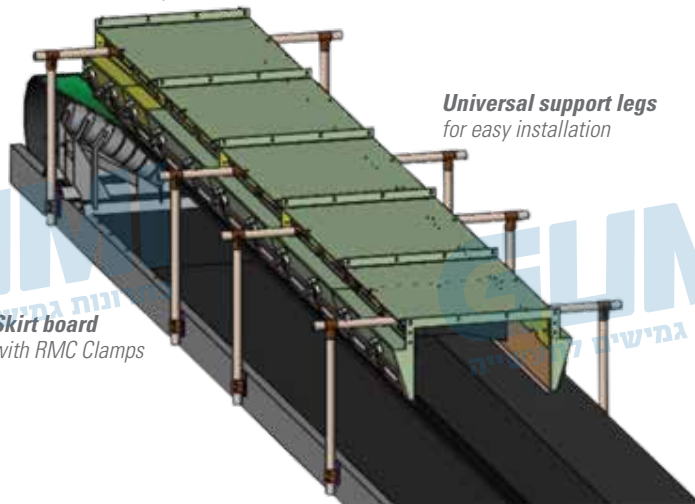

Universal support legs for easy installation

Skirt board with RMC Clamps

Adjustable Liners provide increased skirt liner life



Externally replaceable liners for easy maintenance

Features and Benefits:

- **Easy Installation.** Our skirt legs can be located anywhere along your stringer. With easy slip-on connectors, installing Standard Flexco Skirting Solutions is quick and easy.
- **Rubber Sealing Options.** Seal to your conveyor belt using one of two Flexco rubber sealing options: vertical or tangential.
- **Rear Door Seal.** Provides easy access for wash down, inspection, and repairs.
- **Dust Curtains.** Control air flow throughout the system to keep dust levels low.
- **Easy Maintenance.** Liners are externally replaceable and adjustable.
- **Customizable.** If the standard offering does not suit your application, it can be custom engineered to fit the job requirements.

Standard Urethane Skirting

Ordering Information

| Standard Urethane Skirting | | | | | | | | | |
|----------------------------|----|-----------|-----|--------|----|---------|-----------------|-----------|---------|
| HEIGHT | | THICKNESS | | LENGTH | | CHAMFER | ORDERING NUMBER | ITEM CODE | WT. KG. |
| mm | in | mm | in | m | ft | | | | |
| 150 | 6 | 12 | 1/2 | 7.6 | 25 | 35° | SKPU-6X1/2 X25 | 90283 | 18.1 |
| 150 | 6 | 20 | 3/4 | | | | SKPU-6X3/4 X25 | 90284 | 27.2 |
| 200 | 8 | 12 | 1/2 | | | | SKPU-8X1/2 X25 | 90285 | 26.3 |
| 200 | 8 | 20 | 3/4 | | | | SKPU-8X3/4 X25 | 90286 | 39.0 |

Lead time: 1 working day



RMC1 Skirting System

Low-Cost Solution for Loading Point Spillage

RMC1 Skirt Clamps provide the cost-effective solution to material spillage problems in your conveyor loading zones. A good material containment system at the loading point reduces conveyor problems and saves cleanup costs. It stops material loss, eliminates safety hazards and reduces wear and premature failure of conveyor components.



Optional limited space skirt clamps available

Quick adjustment by using the locking wedges on the clamp pins



Rubber thickness can vary from 8 – 19mm (5/16" – 3/4")

Anti-vibration pin ensures pin remains locked



No hassle installation with few parts and complete step-by-step instructions



Bolt-On PAL PAK available when welding is not an option



Features and Benefits:

- **No belt damage.** With correct installation, the skirt rubber will not drag on the belt, causing premature wear or gouge marks in the belt cover. Such damage reduces belt cleaning efficiency and the life of the belt.
- **Safe service access.** All installation and maintenance work can be done safely from the sides of the conveyor. Climbing into the chute to work on nuts and bolts is not required.
- **Long service life.** Flex-Seal Skirting Systems are made of corrosion-protected components for tough duty. Replacement parts are available.

Ordering Information

| RMC1 Skirt Clamps* | | |
|--------------------|-----------------|-----------|
| Description | Ordering Number | Item Code |
| Skirt Clamp | RMC1 | 75187 |

*Includes two clamp plates (Standard or LS- Limited Space) two clamp pins, and one 1.2M (4') clamp bar.
Skirt board and rubber not included.
Skirt Rubber Thickness Ranges: 8mm to 19mm (5/16" to 3/4").

| PAL PAKs per System Length | | | | | |
|----------------------------|----------------------|----------------------|-----------------------|------------------------|------------------------|
| Skirting System Length | 0.3 - 1.2M (1' - 4') | 1.5 - 2.4M (5' - 8') | 2.8 - 3.8M (9' - 12') | 4.0 - 4.9M (13' - 16') | 5.2 - 6.1M (17' - 20') |
| PAL PAKs Needed | 1 | 2 | 3 | 4 | 5 |

| PAL-PAKs | | |
|-----------------|-----------------|-----------|
| Description | Ordering Number | Item Code |
| PAL PAK | RMC1-PP | 75832 |
| Bolt-On PAL PAK | RMC1-BPP | 76415 |




RMC1 Skirt Clamp (Standard)



PAL PAK (Standard)



Bolt-On PAL PAK (Standard)



Standard

FLEX-SEAL™ Skirting System

Solves Spillage and Dust Control Problems

Flex-Seal™ Skirting System is a dynamic containment unit that fully seals the loading zone. It stops material spillage leaks, controls dust emissions and helps prevent other resulting problems such as belt damage. Conventional skirt clamps and systems may contain spillage of materials, but maintenance is typically difficult and time-consuming. And more importantly, the damage done to the conveyor belt is costly. The Flex-Seal Skirting System creates a parallel seal with the belt to be effective for your operation.



Quick adjustment by using the locking wedges on the clamp pins

Anti-vibration pin ensures pin remains locked




Comes in easy-to-use 1.2M (4') lengths



Rubber thickness can vary from 8-19mm (5/16" to 3/4")

Angles the skirt rubber so it seals with low contact pressure and without damaging the belt

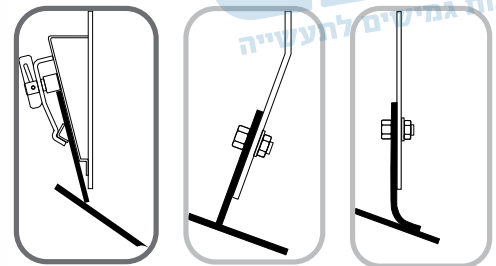

No hassle installation with few parts and complete step-by-step instructions

Features and Benefits:

- **No belt damage.** With correct installation, the skirt rubber will not drag on the belt, causing premature wear or gouge marks in the belt cover. Such damage reduces belt cleaning efficiency and the life of the belt.
- **Safe service access.** All installation and maintenance work can be done safely from the sides of the conveyor. Climbing into the chute to work on nuts and bolts is not required.
- **Long service life.** Flex-Seal Skirting Systems are made of corrosion-protected components for tough duty. Replacement parts are available.

Ordering Information

| Flex-Seal Skirt System* | | |
|-------------------------|-----------------|-----------|
| Description | Ordering Number | Item Code |
| Flex-Seal™ Skirt System | RMC2-FS | 76558 |

*Includes angle plate, one Bolt-On PAL PAK, and one 1.2M (4') Clamp Bar. Skirt board and rubber not included.
Skirt Rubber Thickness Ranges: 8mm to 19mm (5/16" to 3/4")

| Replacement Parts* | | |
|--------------------|-----------------|-----------|
| Description | Ordering Number | Item Code |
| Angle Plate | RMC2-AP | 76559 |
| Bolt-On PAL PAK* | RMC1-BPP | 76415 |
| Clamp Bar | RMC1-CB | 75820 |

*Includes two bolt-on clamp pins and two clamp plates.

| Specifications | |
|--|---------------|
| Skirt Rubber Width and Thickness Range | |
| Width Required | 150mm (6") |
| Thickness Range | 20mm (25/32") |

